



**C A S S I N I <sup>TM</sup>**

**MODEL: C-1202**  
**1100MM X 102MM**  
**ASTRONOMICAL REFLECTOR**



**COSMO BRANDS INC.**  
**WWW.COSMOOPTICS.COM**



# CASSINI C-1202 OPERATING INSTRUCTIONS

## INTRODUCTION

THIS TELESCOPE HAS BEEN PRODUCED TO PRECISE SPECIFICATIONS.

PRIOR TO USING YOUR NEW CASSINI TELESCOPE, PLEASE READ THE FOLLOWING SETUP AND USAGE INSTRUCTIONS. IT IS IMPORTANT TO PROPERLY ASSEMBLE YOUR TELESCOPE IN ORDER TO ALLOW IT TO FUNCTION PROPERLY.

USE THE TELESCOPE FOR TERRESTRIAL (LAND) VIEWING BEFORE ATTEMPTING TO VIEW ASTRONOMICAL OBJECTS. THIS WILL FAMILIARIZE YOU WITH HOW POWERFUL EACH EYEPIECE WILL BE, AS WELL AS INTRODUCE YOU TO THE FUNCTIONS OF YOUR ACCESSORY LENSES.

THE IMAGE YOU SEE WILL BE UPSIDE DOWN AND BACKWARD. THIS IS DUE TO THE FACT THAT YOUR TELESCOPE IS AN ASTRONOMICAL TELESCOPE AND HAS BEEN MANUFACTURED FOR ASTRONOMICAL OBSERVATIONS.

WE RECOMMEND YOU BEGIN WITH THE LOWEST POWER EYEPIECE(20MM) WHEN USING YOUR TELESCOPE. AS YOU INCREASE THE POWER TO 6MM YOUR POWER WILL BE HIGHER, BUT THE IMAGE WILL APPEAR DARKER. THIS IS DUE TO THE BASIC PHYSICAL PROPERTIES OF THE TELESCOPE. THE HIGHER THE POWER YOU USE, THE DARKER THE IMAGE WILL APPEAR AND YOUR VIEWING FIELD WILL BE MORE NARROW.

PLEASE BE PATIENT WHEN USING YOUR TELESCOPE. IT IS A VERY SENSITIVE INSTRUMENT THAT IS CAPABLE OF USING HIGH POWER. HOWEVER, THE MORE POWER YOU USE, THE MORE SENSITIVE THE TELESCOPE BECOMES. AS A RESULT THE SLIGHTEST MOVEMENT OF THE TELESCOPE COULD CAUSE YOU TO LOSE THE IMAGE YOU HAVE IN YOUR EYEPIECE. PRACTICE WILL ENABLE YOU TO KNOW HOW MUCH MOVEMENT TO EXPECT WITH EACH EYEPIECE AND IT'S CORRESPONDING POWER.

NOTE: SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



## ACCESSORIES

### A) MARS-EYE ELECTRONIC FINDER:

USED TO LOCATE OBJECTS PRIOR TO USING MAIN TELESCOPE.  
PLEASE NOTE YOU MUST ALIGN THE FINDER WITH THE MAIN  
TUBE PRIOR TO INITIAL ASTRONOMICAL OR TERRESTRIAL USE.



### B) EYEPIECES:

6MM EYEPIECE=183X  
MOST POWERFUL - LEAST LIGHT  
20MM EYEPIECE = 55X  
LEAST POWERFUL - MOST LIGHT



### C) 2 INCH TO 1.25 INCH ADAPTER

(COMES ATTACHED TO THE HELICAL RACK & PINION FOCUSER)




### D) HELICAL RACK & PINION FOCUSING.

(COMES ATTACHED TO THE OPTICAL TUBE ASSEMBLY)  
ALLOWS FOR PRECISE FOCUSING.



### E) TWO COUNTER BALANCE WEIGHT ASSEMBLY.



### F) CASSINI CD-ROM

#### PLANETARIUM

FROM ANY LOCATION YOU CAN SEE THE SKY AS IT APPEARS AT  
ANY TIME OF DAY, OR EVEN IN THE FUTURE.






# C-1202 TELESCOPE ASSEMBLY INSTRUCTIONS

CAUTION: VIEWING THE SUN WITH THIS TELESCOPE OR EVEN THE UNAIDED EYE CAN RESULT IN BLINDNESS OR OTHER SERIOUS EYE DAMAGE WHICH MAY BE PERMANENT. NEVER POINT YOUR TELESCOPE AT THE SUN

1. REMOVE ALL PARTS FROM BOX AND IDENTIFY THEM.



TELESCOPE W/MOUNT ATTACHED  
TRIPOD(PREASSEMBLED)  
COUNTER WEIGHT SHAFTS  
COUNTER WEIGHTS  
MARS-EYE FINDER  
EYEPIECES(20MM & 6MM )  
2 INCH TO 1.25 INCH ADAPTER  
ACCESSORY TRAY  
CD-ROM




2. EXTEND TRIPOD LEGS EQUALLY AND TIGHTEN LOCKING KNOBS.

3. ATTACH TELESCOPE + MOUNT TO TRIPOD AS SHOWN.  
(DO NOT OVER TIGHTEN)



NOTE : TENSION SPRING & WASHER  
LOCATED HERE



4. ATTACH ACCESSORY TRAY



ACCESSORY TRAY

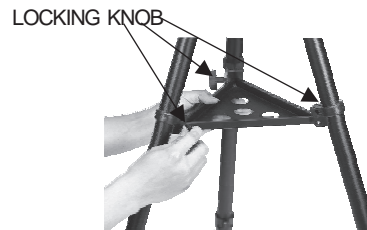

- (1) SPREAD TRIPOD LEGS APART SO THE TRAY WILL FIT UNDERNEATH  
(2) PLACE THE TRAY'S HOOK OVER THE HOLDER'S METAL ROD AND PUSH DOWN  
(3) TIGHTEN THE HOLDER'S LOCKING KNOB TO HOLD THE ACCESSORY TRAY IN PLACE



# C-1202 TELESCOPE ASSEMBLY INSTRUCTIONS

5. LOOSEN SCREW ON MARS-EYE FINDER AND SLIDE ONTO BRACKET. TIGHTEN ATTACHMENT SCREWS. ( PLEASE SEE FURTHER INSTRUCTIONS ON MARS-EYE FINDER).



6. BALANCE THE MAIN TUBE BY MOVING IT AS SHOWN

BALANCE MARK



7. BALANCE TELESCOPE BY MOVING THE COUNTER WEIGHTS AS SHOWN





# C-1202 TELESCOPE ASSEMBLY INSTRUCTIONS


8. ATTACH THE SLOW-MOTION KNOB TO THE SHAFT OF SLOW-MOTION ON THE TRIPOD AS SHOWN



9. REMOVE CAPS WHEN TELESCOPE IS IN USE, AND REPLACE WHEN NOT IN USE. THIS WILL KEEP THE TELESCOPE'S OPTICS CLEAN.




10. THE COLLIMATION DOT ON THE PRIMARY MIRROR IS FOR THE OPTICAL ALIGNMENT OF THE TELESCOPE, AND IS NOT A DEFECT.





# FEATURES OF CASSINI C-1202

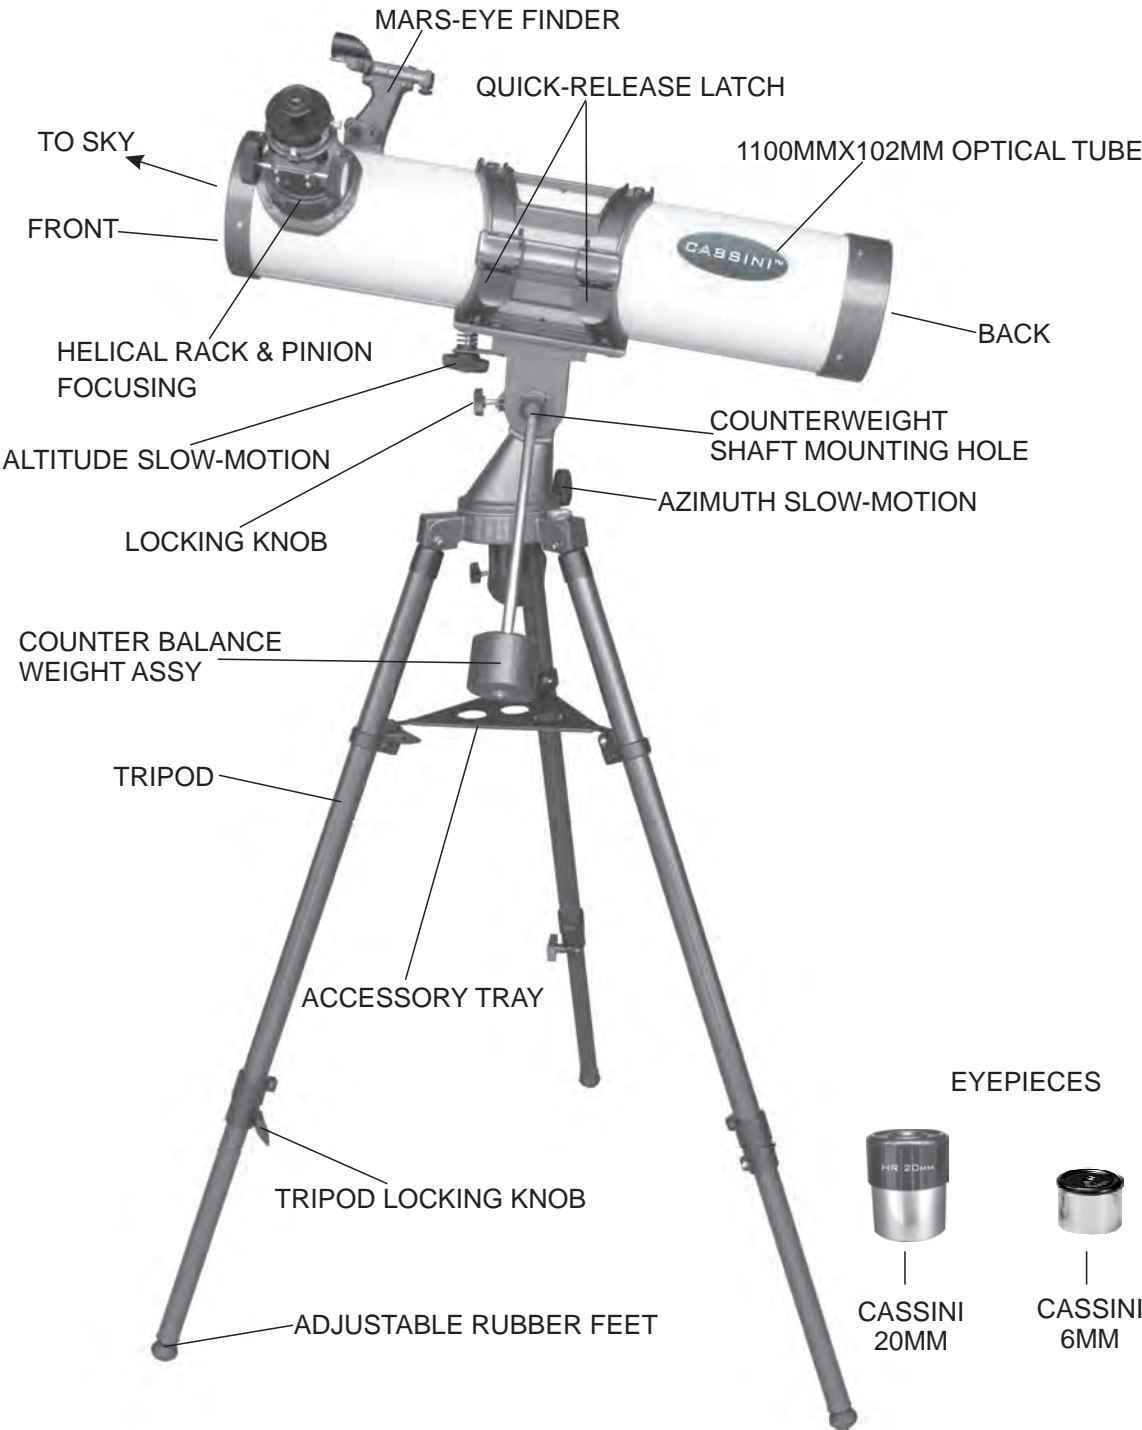





# HOW TO USE EYEPIECES & ACCESSORIES

PROPER PLACEMENT OF THE EYEPIECES AND ACCESSORIES ARE IMPORTANT IN ORDER TO ASSURE EASY OPERATIONS AND CLEAR VIEWING.

PLEASE CONSIDER USING YOUR ACCESSORIES IN THE FOLLOWING ORDER. BY DOING THIS YOU WILL BETTER UNDERSTAND THE IMPACT EACH INDIVIDUAL ACCESSORY HAS ON THE FUNCTION OF YOUR TELESCOPE.



1. FOCUSING TUBE - TURN FOCUSING WHEELS TOWARD THE TELESCOPE UNTIL IT WILL GO NO FURTHER. TO FOCUS BEGIN TO TURN THE FOCUSING KNOBS TOWARD YOUR BODY, SLOWLY, UNTIL THE IMAGE IS CLEAR. NOTE: YOU MUST HAVE AN EYEPIECE INSERTED IN ORDER TO VIEW IMAGE.

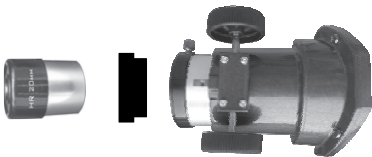

2. EYEPIECE INSERTION - INSERT AN EYEPIECE INTO THE RECEIVING END OF THE FOCUSING TUBE. WE SUGGEST YOU ALWAYS BEGIN WITH THE LOWEST POWER EYEPIECE (20MM). THE LOWER THE NUMBER ON THE EYEPIECE, THE HIGHER THE POWER YOUR TELESCOPE WILL BE USING. ALSO AS YOU INCREASE YOUR POWER YOU WILL DECREASE THE FIELD OF VIEW AND THE BRIGHTNESS OF YOUR TELESCOPE. WE SUGGEST YOU ALWAYS USE THE LOWEST POWER REQUIRED TO VIEW YOUR SUBJECT.





# MARS-EYE ELECTRONIC FINDER MOUNTING & ALIGNMENT

## TO MOUNT:

- 1) REMOVE MARS-EYE ELECTRONIC FINDER FROM BOX.
- 2) LOOSEN THUMB SCREWS ON SIDE OF FINDER AND SLIDE FINDER ONTO DOVETAIL MOUNT LOCATED AT TOP OF MAIN TELESCOPE TUBE.
- 3) TIGHTEN THUMB SCREWS.

## TO CHECK ALIGNMENT WITH MAIN TELESCOPE:(IMPORTANT!)

- 1) THE MARS-EYE ELECTRONIC FINDER IS NOT PRE-SET AT FACTORY. THE FOLLOWING WILL ALLOW YOU TO ADJUST THE ALIGNMENT.
- 2) DURING THE DAY LIGHT HOURS, AIM THE MAIN TELESCOPE AT AN OBJECT AT LEAST 1/4 MILE OR MORE IN THE DISTANCE AND BRING IT INTO FOCUS.(VERY IMPORTANT)
- 3) ONCE YOU HAVE CENTERED THE REFERENCE ITEM IN THE MAIN TUBE, TIGHTEN ALL KNOBS AND ADJUSTMENTS TO PREVENT ANY MOVEMENT.
- 4) REMOVE CIRCULAR BATTERY SAVER LOCATED BENEATH FRONT OF FINDER (BE SURE TO SAVE AND REPLACE THE BATTERY SAVER WHEN NOT IN USE.)
- 5) TURN FINDER ON BY SLIDING ON/OFF SWITCH FORWARD.ON/OFF SWITCH IS LOCATED ON THE RIGHT SIDE OF THE FINDER.
- 6) LOOK THROUGH THE FINDER AND LOCATE THE RED DOT.
- 7) IF THE OBJECT IN THE MARS-EYE FINDER IS NOT THE OBJECT YOU SEE THROUGH THE MAIN TELESCOPE TUBE, ADJUSTMENT IS REQUIRED.
- 8) TO MOVE THE RED DOT UP AND DOWN, SIMPLY TURN THE ELEVATION SCREW LOCATED ON THE REAR BOTTOM OF THE FINDER TO HEIGHT REQUIRED.
- 9) TO MOVE THE RED DOT LEFT AND RIGHT, SIMPLY TURN THE WINDAGE SCREW LOCATED AT THE FRONT LEFT SIDE OF THE FINDER TO THE PROPER POSITION.
- 10) THESE ADJUSTMENTS WILL ALLOW YOU TO POSITION THE RED DOT ON THE SAME OBJECT CENTERED IN THE MAIN TELESCOPE.





## POWER CHART

EYEPiece

6MM

20MM

POWER

183X

55X

## GETTING THE MOST FROM YOUR TELESCOPE

TAKE THE TIME TO BECOME FAMILIAR WITH YOUR NEW TELESCOPE. LEARN THE NAMES OF THE VARIOUS PARTS, WHERE THEY ARE LOCATED AND THEIR FUNCTION. IT IS BEST TO PERFORM THESE FUNCTIONS DURING THE DAY TIME.

WHEN SETTING UP FOR A VIEWING SESSION, PLACE THE TELESCOPE IN AN AREA SHELTERED FROM THE WIND IF POSSIBLE. THE BEST NIGHT TIME VIEWING WILL BE AWAY FROM CITY LIGHT AND WHEN THE ATMOSPHERE IS "STEADY".

WITH A LITTLE PRACTICE YOU WILL LEARN TO JUDGE WHEN VIEWING CONDITIONS ARE GOOD. LOOK FOR THE NIGHTS WHEN THE STARS SHINE BRIGHTLY WITH LITTLE OR NO TWINKLING.


USE LOW POWER TO TAKE ADVANTAGE OF THE WIDER FIELD OF VIEW AND BRIGHTER IMAGE. RESERVE YOUR HIGHER POWERS FOR THOSE NIGHTS WHEN VIEWING CONDITIONS ALLOW FOR DETAILED OBSERVATIONS.



**C A S S I N I <sup>TM</sup>**

C-1202

OPERATING INSTRUCTIONS

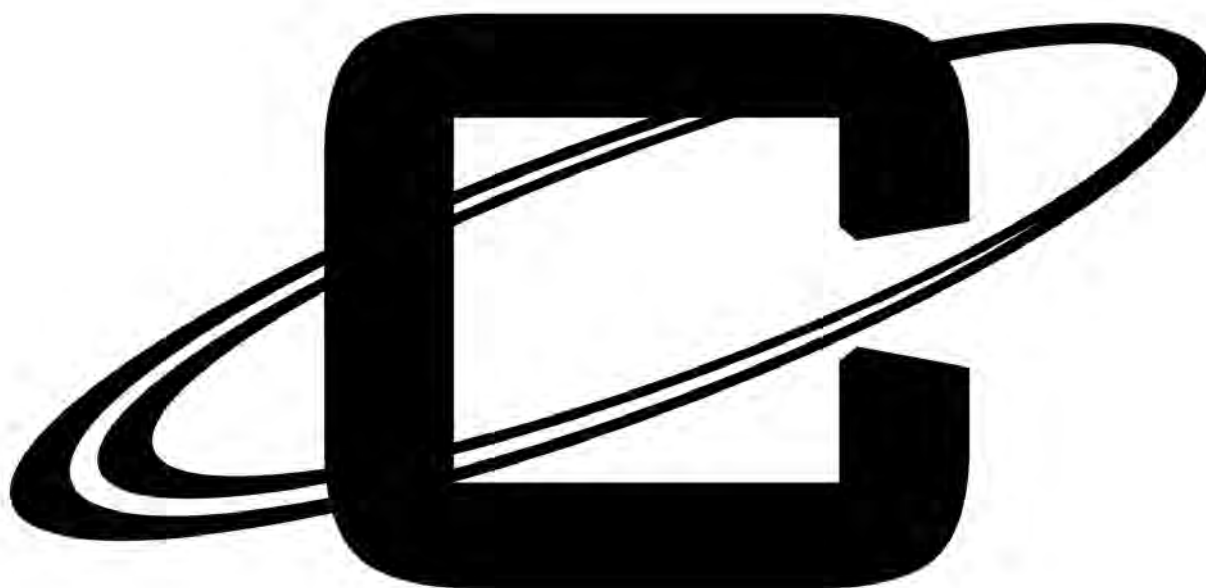

**COSMO BRANDS INC.  
21230 SW 246TH ST. REDLAND FL 33031  
WWW.COSMOSOPTICS.COM**